

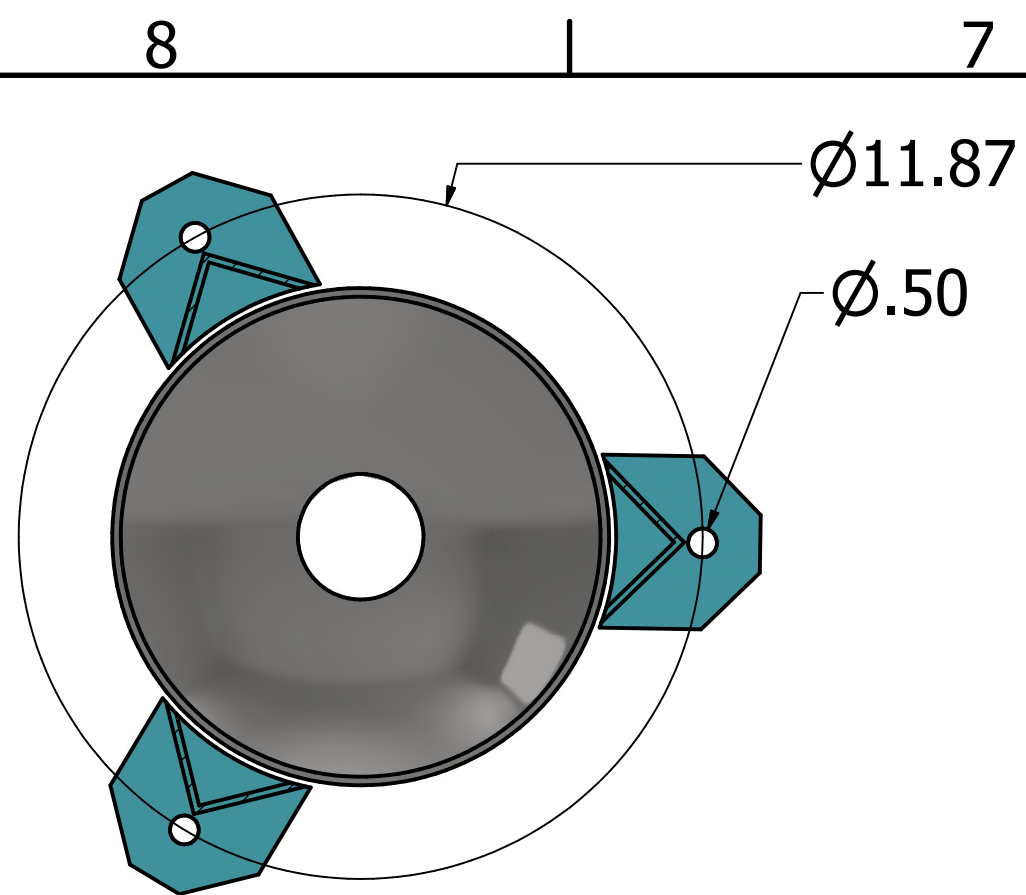
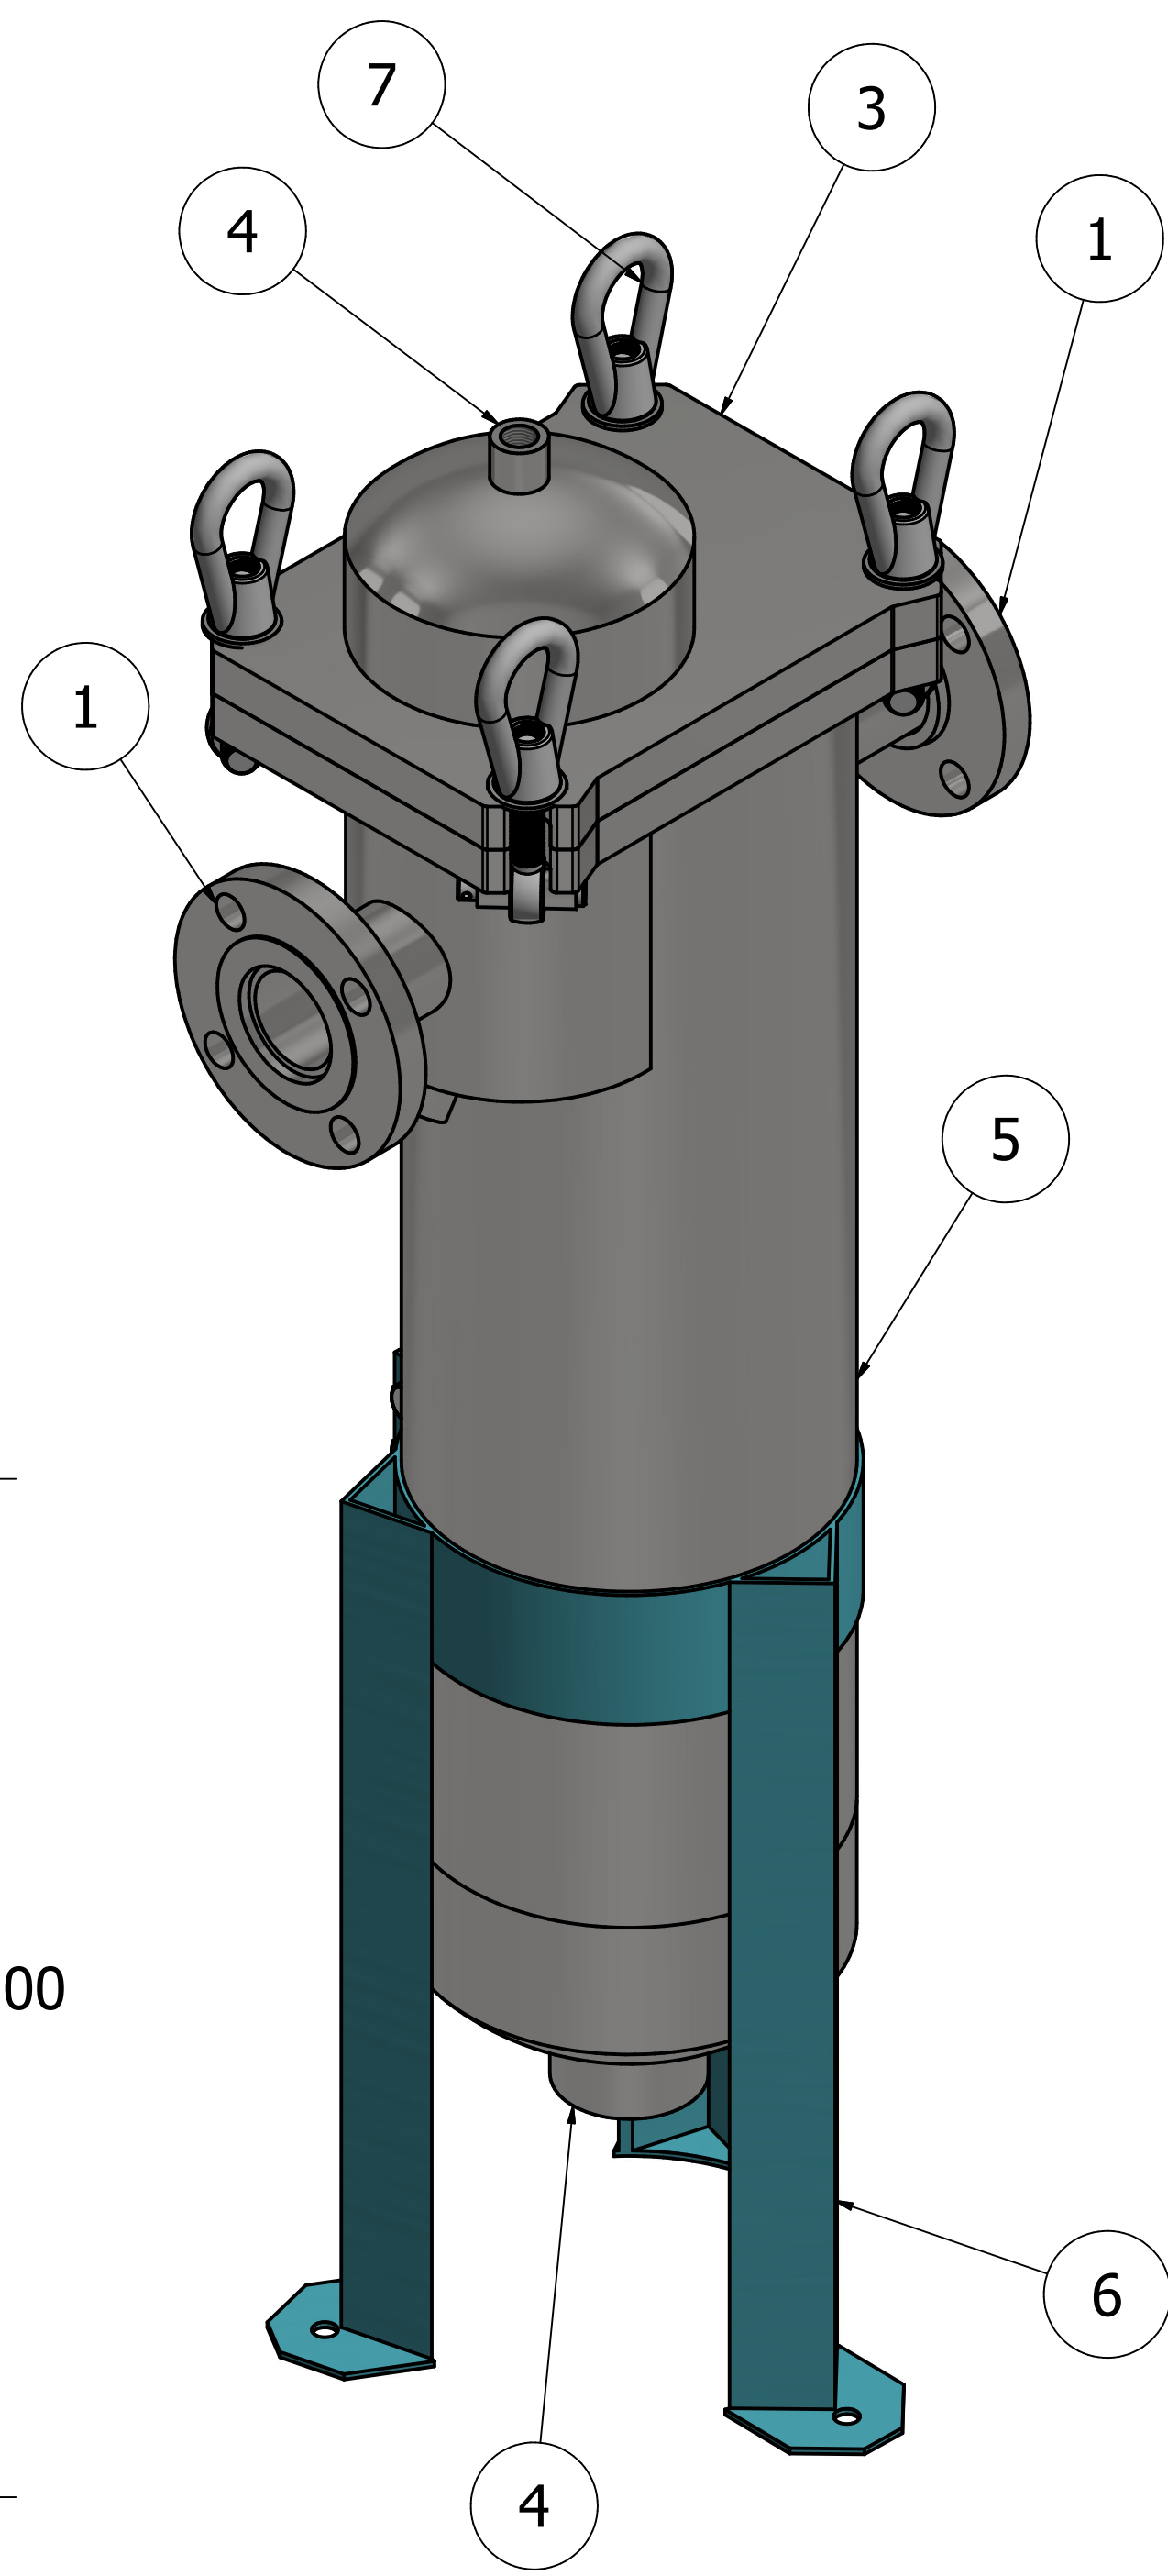
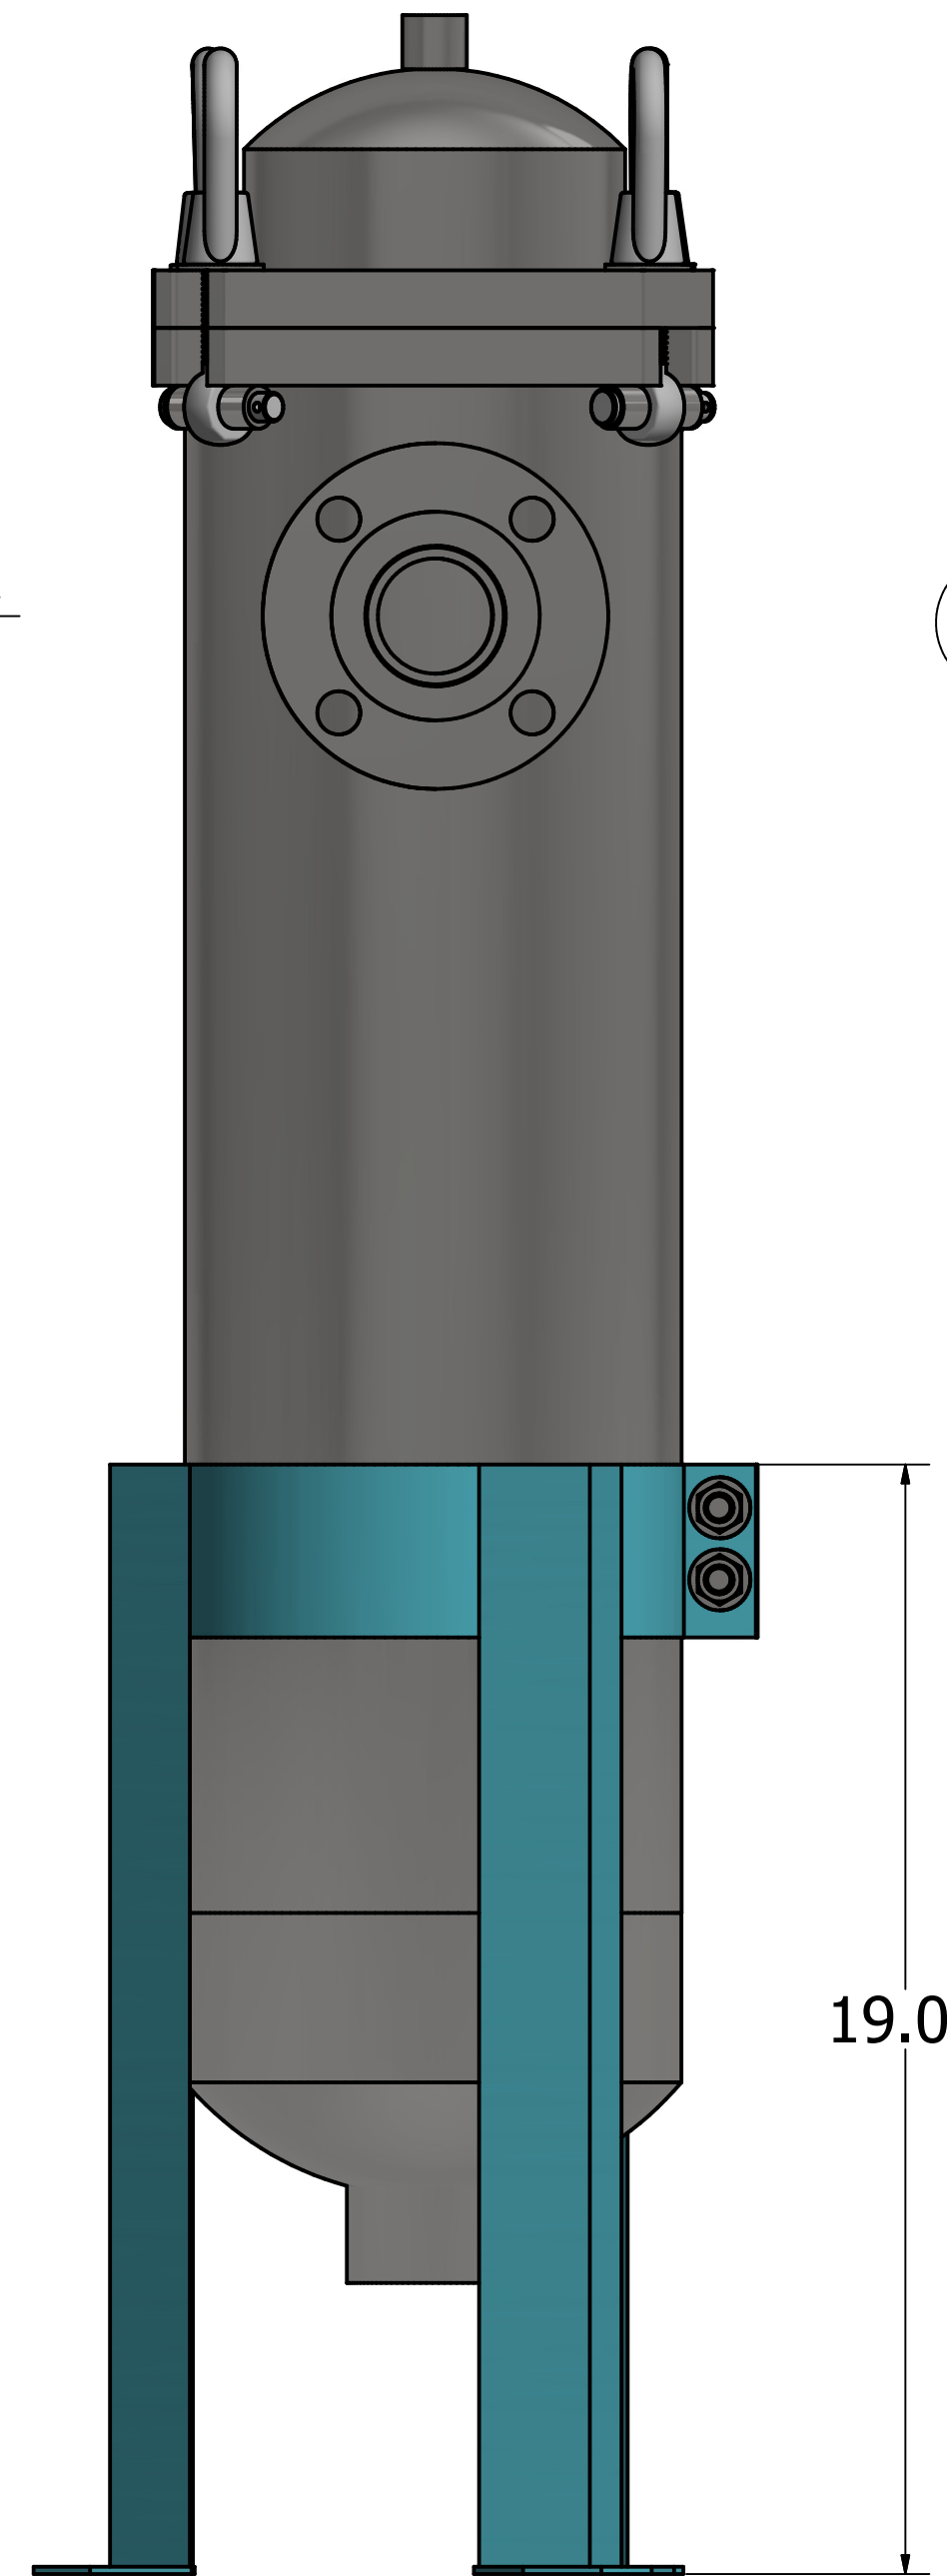


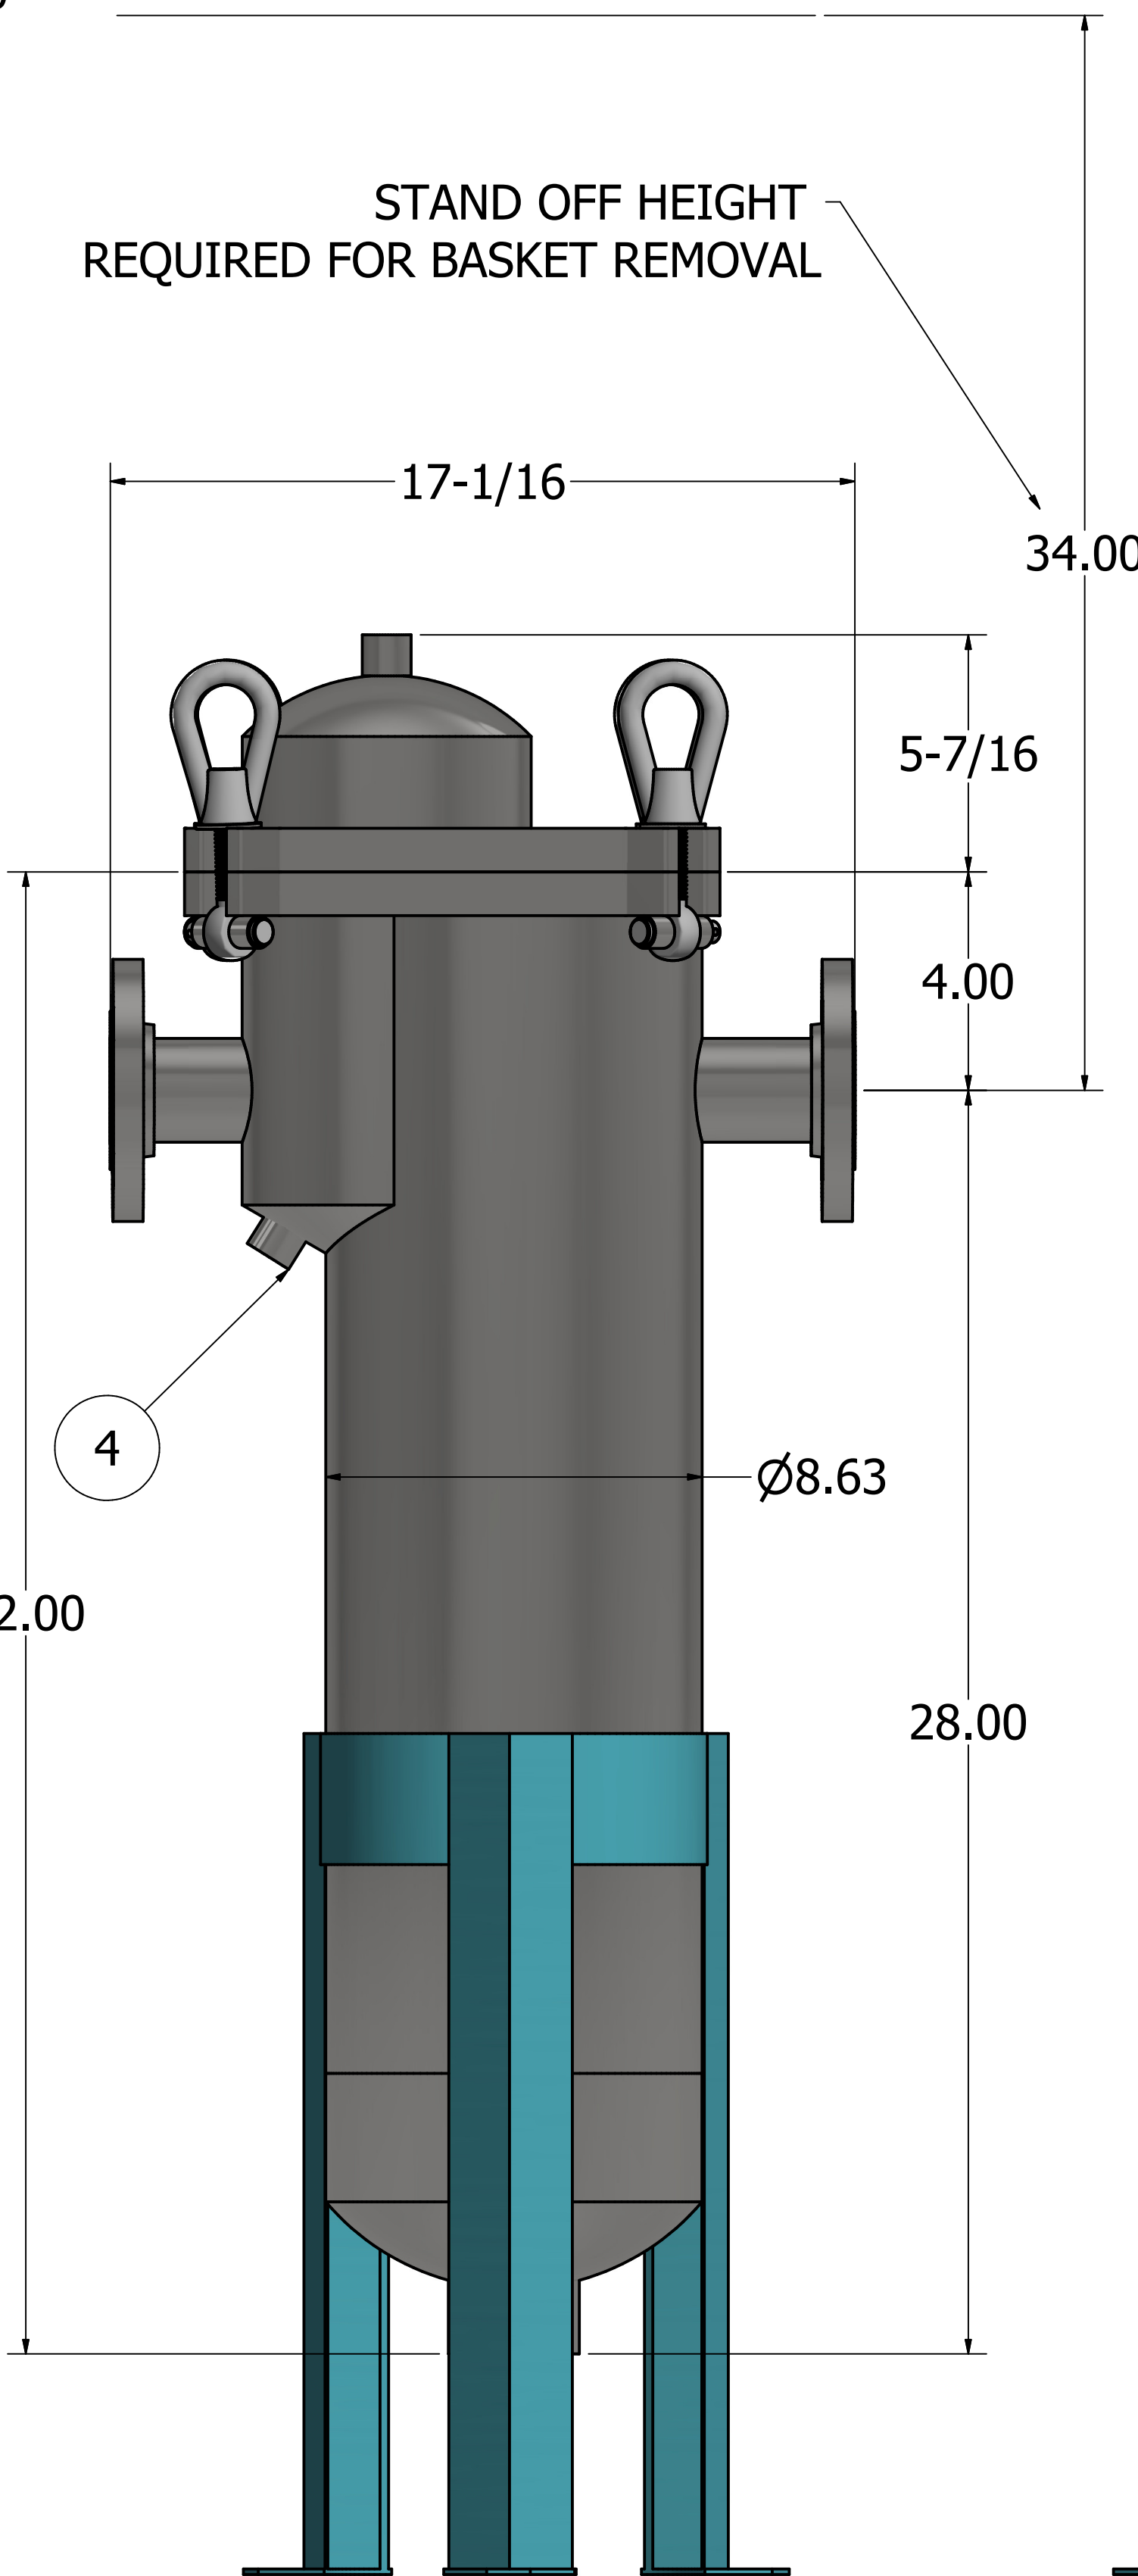

SECTION A-A
SCALE 0.3

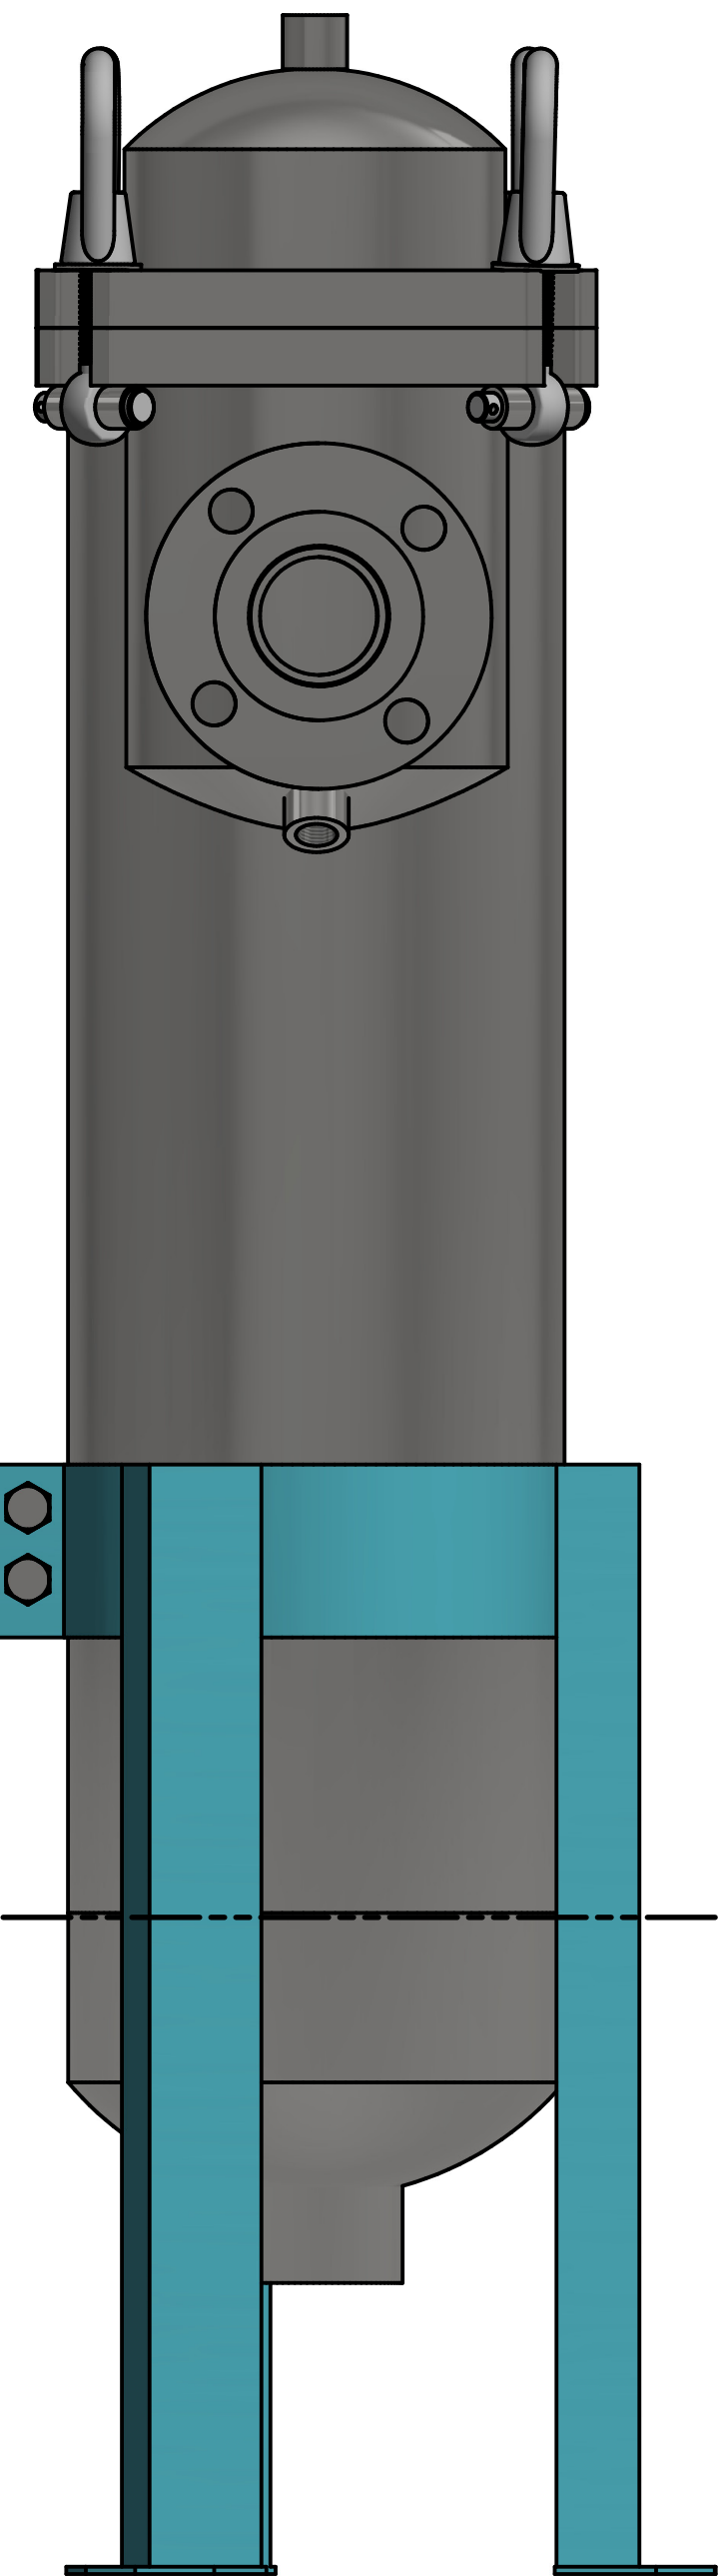

ALL DIMENSIONS ARE INCHES

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	2"-150# SORF	INLET/OUTLET FLANGES 2"-150# SORF
2	1	Half Coupling Threaded - Class 3000 2 x 2	DRAIN CONNECTION 2" NPTF
3	1	COVER	TOP COVER
4	2	Half Coupling Threaded - Class 3000 1/2 x 1/2	Vent Connection and Inlet Drain Connection
5	1	CentralBody.8.0	Central Body
6	1	Strainer Stand	Strainer Stand 1-1/2 SS Fabricated Angle
7	4	Eyebolt and Eyenut set for quick opening	Quick closing fasteners

CONSTRUCTION AS PER ASME SECTION VIII
MAX WORKING PRESSURE: 150 PSI
HYDROTEST PRESSURE 205 PSI
MAX TEMP: 250°F
MIN TEMP: -20°F
MATERIALS:
CARBON STEEL OR 316SS

DRAWN J PERINO	2/8/2021	FLUID FILTRATION MFG CORP		
CHECKED A SUBERO	02/08/2021	TITLE		
QA		FILTER ASSEMBLY		
MFG A SUBERO	02/18/2021	FF.PR.2.0.150		
APPROVED AL BORZI		SIZE D	DWG NO FF.PR.2.0.150.1	REV 1
		SCALE 0.3	SHEET 1 OF 1	